


侧装式整体机组适用于多种应用场合。标准机组在贴墙安装时可以堆叠应用，机组室外侧和室内侧壳体是由经过吸附能力强的环氧粉末喷涂处理的钢板组成，防腐性能极佳。采用全封闭压缩机，R404A制冷剂。

The side-mounted integral unit is suitable for a wide range of applications. Standard units can be stacked when installed against a wall. The exterior and interior casings are made of steel plates coated with high-adhesion epoxy powder, providing excellent corrosion resistance. The unit employs a fully enclosed compressor and uses R404A refrigerant.



尺寸图
Dimension drawing

	L	W	H	WK	HK
C1	1050	530	905	475	500
C2	1050	620	905	585	500
C3	1286	803	990	770	630

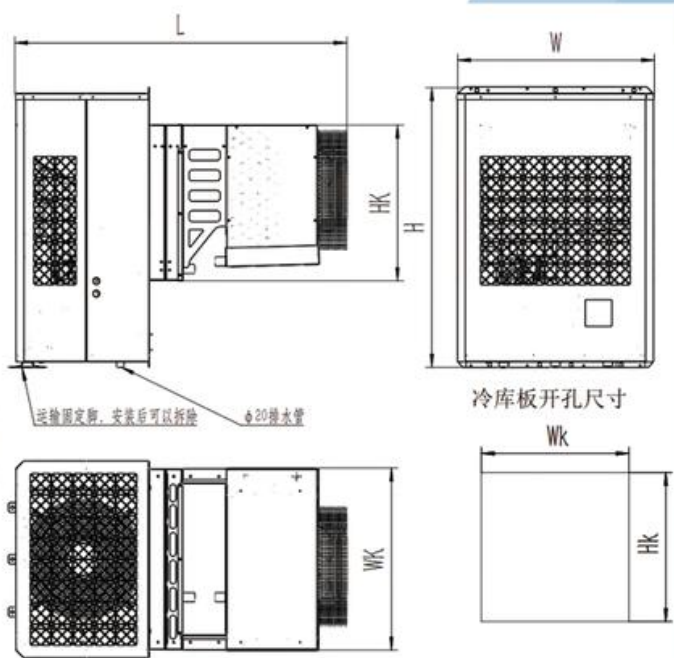

运输固定脚，安装后可以拆除 $\phi 20$ 排水管

侧装整体机组参数 | PARAMETERS OF AOS SIDE-MOUNTED COMPLETE MACHINE

型号/model		YC-010A	YC-015A	YC-020A	YC-030A	YC-040A
电源 Power supply		220V-240V~50Hz				
冷凝温度45℃ 蒸发温度-2℃ Condensation temperature 45℃ Evaporating temperature -2℃	名义制冷量 (W) Cooling capacity (W)	2265	3400	4575	6510	9130
	额定功率 (W) Capacity (W)	1000	1500	1885	2510	3635
	建议最小库容(m ³) Suggested min volume of cold storage(m ³)	11	15	25	70	80
	建议最大库容(m ³) Suggested max volume of cold storage(m ³)	23	35	50	100	120
冷凝温度45℃ 蒸发温度-8℃ Condensation temperature 45℃ Evaporating temperature -8℃	名义制冷量 (W) Cooling capacity (W)	1805	2705	3580	5135	7200
	额定功率 (W) Capacity (W)	950	1427	1800	2390	3465
	建议最小库容(m ³) Suggested min volume of cold storage(m ³)	9	13	20	45	50
	建议最大库容(m ³) Suggested max volume of cold storage(m ³)	20	30	45	80	90
冷凝温度45℃ 蒸发温度-15℃ Condensation temperature 45℃ Evaporating temperature -15℃	名义制冷量 (W) Cooling capacity (W)	1350	2025	2700	3845	5390
	额定功率 (W) Capacity (W)	895	1340	1700	2250	3255
	建议最小库容(m ³) Suggested min volume of cold storage(m ³)	5	10	16	20	25
	建议最大库容(m ³) Suggested max volume of cold storage(m ³)	11	20	30	40	50
冷凝温度45℃ 蒸发温度-25℃ Condensation temperature 45℃ Evaporating temperature -25℃	名义制冷量 (W) Cooling capacity (W)	865	1300	1740	2480	3475
	额定功率 (W) Capacity (W)	810	1215	1530	2040	2950
	建议最小库容(m ³) Suggested min volume of cold storage(m ³)	4	5	10	15	20
	建议最大库容(m ³) Suggested max volume of cold storage(m ³)	9	11	20	30	40
除霜方式 Defrosting method		热氟除霜 Hot fluorine defrosting				
压缩机 Compressor	HP	1	1.5	2	3	4
	类型 Type	涡旋压缩机 Scroll Compressor				
制冷剂/冲注量(KG) Refrigerant/charge volume		0.9	1.2	1.5	2.5	2.8
产品外观图 Product appearance drawing		C1	C2		C3	
产品尺寸L*W*H(mm) Product size		1050X530X905	1050X620X905		1286X803X990	
包装尺寸L*W*H(mm) Packaging size		1140X615X1045	1140X705X1045		1375X890X1130	
冷库板开孔尺寸WK*HK(mm) The size of the opening for cold storage panels		475*500	585*500		770*630	
净重(KG) Net weight		90	110		150	