
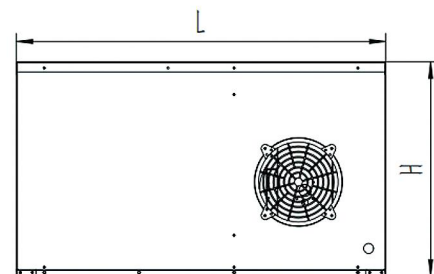


顶置式整体机组适用于多种应用场合。标准机组在贴墙安装时可以堆叠应用，机组室外侧和室内侧壳体是由经过吸附能力强的环氧粉末喷涂处理的钢板组成，防腐性能极佳。采用全封闭压缩机，R404A制冷剂。

The overhead integrated unit is suitable for various application scenarios. Standard units can be stacked for wall-mounted installation. The outdoor and indoor casings are made of steel plates coated with high-adhesion epoxy powder, offering excellent corrosion resistance. It features a fully enclosed compressor and uses R404A refrigerant.

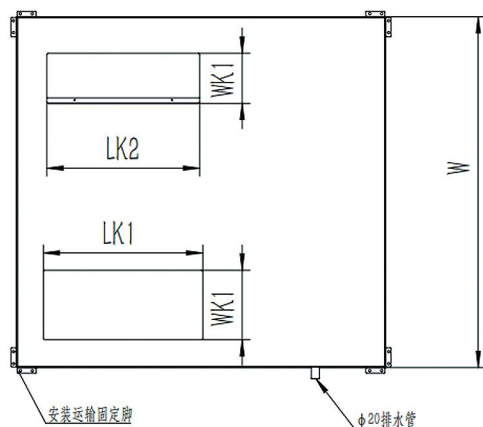

尺寸图

Dimension drawing

	L	W	H	LK1	WK1	LK2	WK2
D1	931	880	535	405	175	385	125
D2	1100	880	660	470	175	450	125

型号/model		DZ-010A	DZ-015A	DZ-020A	DZ-030A
电源 Power supply		220V-240V \sim 50Hz			
冷凝温度45 $^{\circ}$ C 蒸发温度-2 $^{\circ}$ C Condensation temperature 45 $^{\circ}$ C Evaporating temperature -2 $^{\circ}$ C	名义制冷量 (W) Cooling capacity (W)	2265	3400	4575	6510
	额定功率 (W) Capacity (W)	1000	1500	1885	2510
	建议最小库容(m 3) Suggested min volume of cold storage(m 3)	11	15	25	70
	建议最大库容(m 3) Suggested max volume of cold storage(m 3)	23	35	50	100
冷凝温度45 $^{\circ}$ C 蒸发温度-8 $^{\circ}$ C Condensation temperature 45 $^{\circ}$ C Evaporating temperature -8 $^{\circ}$ C	名义制冷量 (W) Cooling capacity (W)	1805	2705	3580	5135
	额定功率 (W) Capacity (W)	950	1427	1800	2390
	建议最小库容(m 3) Suggested min volume of cold storage(m 3)	9	13	20	45
	建议最大库容(m 3) Suggested max volume of cold storage(m 3)	20	30	45	80
冷凝温度45 $^{\circ}$ C 蒸发温度-15 $^{\circ}$ C Condensation temperature 45 $^{\circ}$ C Evaporating temperature -15 $^{\circ}$ C	名义制冷量 (W) Cooling capacity (W)	1350	2025	2700	3845
	额定功率 (W) Capacity (W)	895	1340	1700	2250
	建议最小库容(m 3) Suggested min volume of cold storage(m 3)	5	10	16	20
	建议最大库容(m 3) Suggested max volume of cold storage(m 3)	11	20	30	40
冷凝温度45 $^{\circ}$ C 蒸发温度-25 $^{\circ}$ C Condensation temperature 45 $^{\circ}$ C Evaporating temperature -25 $^{\circ}$ C	名义制冷量 (W) Cooling capacity (W)	865	1300	1740	2480
	额定功率 (W) Capacity (W)	810	1215	1530	2040
	建议最小库容(m 3) Suggested min volume of cold storage(m 3)	4	5	10	15
	建议最大库容(m 3) Suggested max volume of cold storage(m 3)	9	11	20	30
除霜方式 Defrosting method		热氟除霜 Hot fluorine defrosting			
压缩机 Compressor	HP	1	1.5	2	3
	类型 Type	涡旋压缩机 Scroll Compressor			
制冷剂/冲注量(KG) Refrigerant/charge volume		R507/0.9	R507/1.2	R507/1.5	R507/2.0
产品外观图 Product appearance drawing		D1	D2		
产品尺寸L*W*H(mm) Product size		931X880X535		1100X880X660	
包装尺寸L*W*H(mm) Packaging size		1015X980X710		1180X965X830	
净重(KG) Net weight		110	145	150	155